




1. With the key OFF, Mark each needle setting on the diagram.



2. Remove the 2 screws over the speedometer.

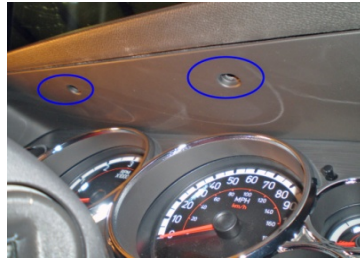

3. Pull out on the plastic. This is held in on with metal clips as shown.




4. Use a flat screw driver to help if required.



5. Start over the speedo to pull down the plastic.



6. This trim is only set behind the dash. It just pulls out.

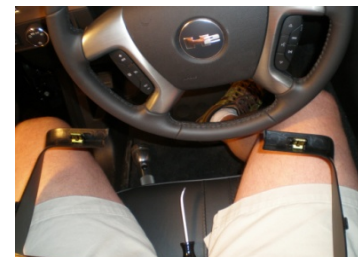

7. As you can see the 2 metal clips on the bottom of the trim.



8. These are only metal clips that hold the trim in place.



9. Remove the brushed trim plate. Start pulling on 1 corner at a time.



10. Brushed trim plate. Be careful not to scratch this!



11. There are clips on each corner.



12. Remove the two 7mm screws.



13. Remove the other two 7mm screws.